



QUARTZ - VERTICAL

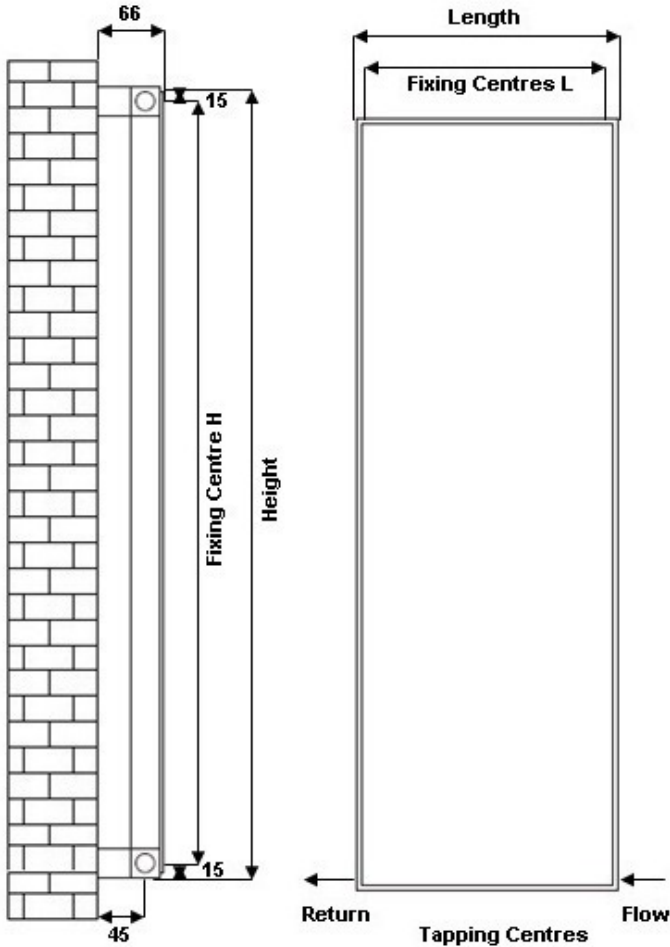

- All the dimensions are shown in millimetres
- Steel tubes – Tube dia 70mm x 10mm
- Header tube dia 30mm x 30 mm
- ½ inch BSP Bottom opposite end tapplings
- Test pressure: 10 Bar
- Max working Pressure: 8 Bar
- Heat output – in accordance with EN 442
- Not suitable for use on direct/open systems


Please Note:

- Summer Element use will affect pipe centres
- **IF USING SUMMER HEATING ELEMENT/DUAL FUEL KIT, IT MUST BE FITTED ON THE RETURN SIDE**

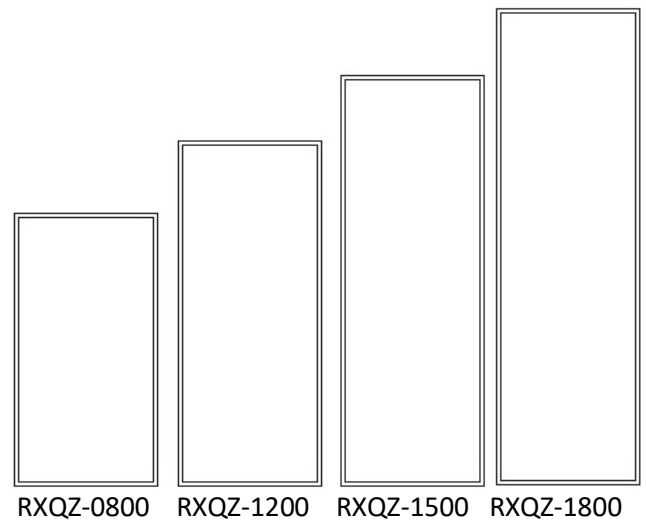

Product	Heat Output dt50 - Coloured/Mirror	Height	Length	Water content (L)	Weight kg	Tapping Centres +/- 2mm	Fixing Centres H +/- 2mm	Fixing Centres L +/- 2mm
RXQZ-0800420-gl	433 / 1476	800	420	3	9.7	495	770	350
RXQZ-0800560-gl	578 / 1971	800	560	4	14	635	770	490
RXQZ-1200420-gl	648 / 2209	1200	420	4.3	14.2	495	1170	350
RXQZ-1200560-gl	863 / 2943	1200	560	6	20.3	635	1170	490
RXQZ-1500280-gl	474 / 1616	1500	280	3.5	11.7	355	1470	210
RXQZ-1500420-gl	811 / 2765	1500	420	5.2	17.6	495	1470	350
RXQZ-1500560-gl	1082 / 3689	1500	560	6.5	21.3	635	1470	490
RXQZ-1800280-gl	570 / 1944	1800	280	4.1	14	355	1770	210
RXQZ-1800420-gl	973 / 3318	1800	420	6.2	20.9	495	1770	350
RXQZ-1800560-gl	1297 / 4423	1800	560	8.3	27.9	635	1770	490

QUARTZ - VERTICAL

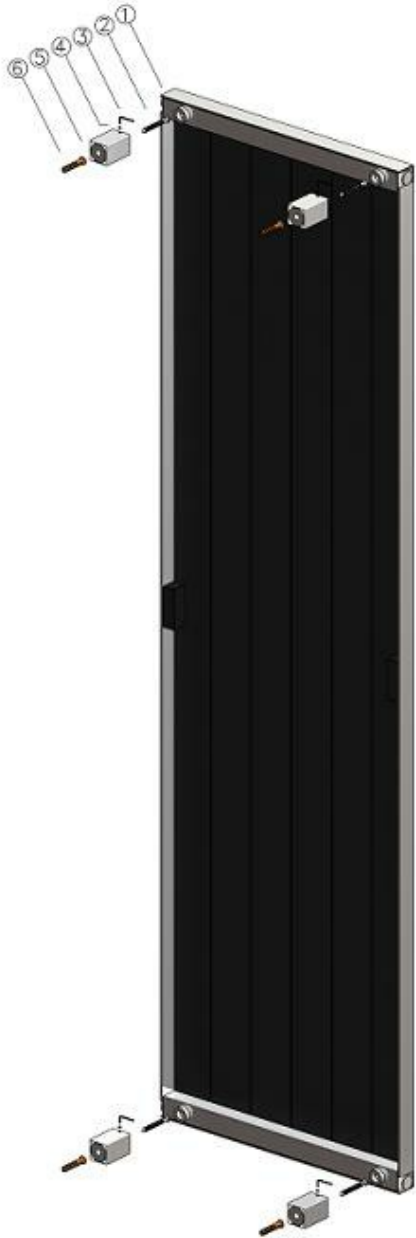

- 1) Solid Fixing Lug
- 2) Wall Screw
- 3) Allen Key (Not Supplied)
- 4) Grub Screw
- 5) Wall Support
- 6) Wall Plug

Installation:

- Step 1:** Select the desired mounting position, ensuring the bottom rail is at least 150mm from the floor. Make sure the wall is adequate to take the weight of the rail i.e Anchor points must be securely attached to a stud.
- Step 2:** Loosely screw the wall support (Part 5) into the wall using the wall screw (2) and washer. Use wall plug (6) if you are fixing into Masonry. Do not tighten full. (Top: The mini screw hole in the side of the wall support (5) should be facing the floor)
- Step 3:** Adjust wall support and, with the aid of a spirit-level, tighten.
- Step 4:** Manoeuvre the rail back onto the bracket and tighten with the grub screw (4).

Important:

- Do not use any abrasive or chemical cleaners to clean the radiators as this will cause damage to the surface finish. Please use warm water and a damp cloth.