


- All the dimensions are shown in millimetres
- Tube dia 60mm x 20mm
- Header tube dia 30mm x 30mm
- Bracket length - 30mm
- ½ inch BSP bottom opposite end connections
- Test pressure: 10 Bar
- Max working temperature: 8 Bar
- Heat output - in accordance with EN 442

**Please Note:**

- Please allow minimum of 100mm for valves
- Summer Element use will affect pipe centres
- The flow and return can be reversed

Nova	Water Content (L)	Weight (KG)	Pipe Centres +/- 2mm	Fixing Centres (H) +/- 2mm	Fixing Centres (W) +/- 2mm	Height (mm)	Width (mm)
RXNO-1500420	9.7	20.3	Width plus valves	1450	360	1500	420
RXNO-1800420	11.6	24.2	Width plus valves	1750	360	1800	420
RXNO-1800600	16.6	34.6	Width plus valves	1750	540	1800	600

## Installation:

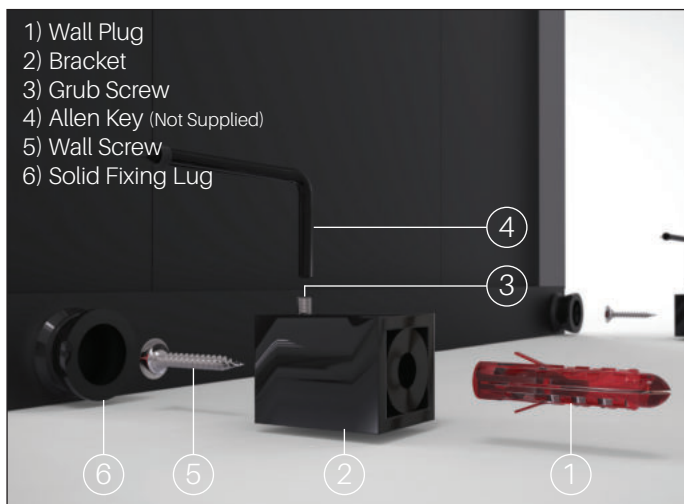

**Step 1:** Select the desired mounting position, ensuring the bottom rail is at least 150mm from the floor. Make sure the wall is adequate to take the fixing points of the rail i.e anchor points must be securely attached to a stud or masonry.

**Step 2:** Loosely fit the bracket (Part 2) to the wall using the wall screw (5) and washer. Use wall plug (1) if you are fixing into masonry. Do not tighten fully.

**Step 3:** Manoeuvre the rail back onto the bracket and tighten with the grub screw (3).

**Cleaning:**

- Do not use any abrasive or chemical cleaners to clean the radiators as this will cause damage to the surface finish. Please use warm water and a damp cloth.
- Do not clean when hot.